



AS/NZS1576:2010
INDUSTRIAL
720KG WORKING LOAD

KITS

PACKS

TRADE SCAFFOLD

5.0 METRE WORKING HEIGHT

The Gorilla Trade Scaffold is a trade tough mobile scaffold system. The lightweight aluminium design allows simple and speedy assembly, dismantling and portability.

The Gorilla Trade Scaffold has a 5.0 metre working height making it perfect for trade use without the need to hire scaffolding. With the flexibility of the different pack options, the Gorilla Trade Scaffold meets most indoor and outdoor construction needs.

Independently tested to AS/NZS1576:2010, the Gorilla Trade Scaffold is perfect for tradesman and serious DIY users.




SINGLE LEVEL KIT

SAFE PLATFORM HEIGHT UP TO 900mm

MADE UP OF:

1x **BASE PACK** ML-RJSKAFF-COM5BSE

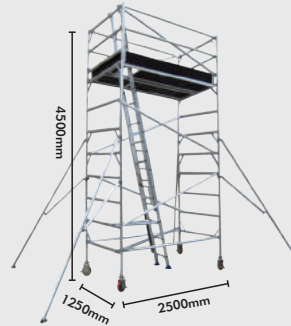


1+1/2 LEVEL KIT

SAFE PLATFORM HEIGHT UP TO 3200mm

MADE UP OF:

1x **BASE PACK** ML-RJSKAFF-COM5BSE
 1x **RISER PACK** ML-RJSKAFF-COM5RISER
 1x **TOE BOARD PACK** ML-RJSKAFF-COM5TOE
 1x **STABILISER PACK** ML-RJSKAFF-STAB
 1x **SCAFFOLD LADDER** ML-RJSKAFF-COM5LDR
 1x **LADDER SUPPORT** ML-RJSKAFF-COM5LDSP

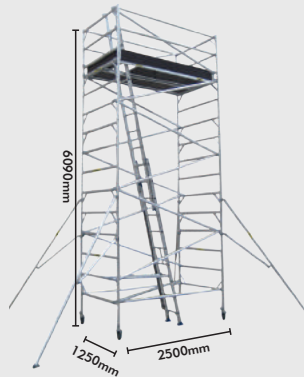

FULL HEIGHT KIT

SAFE PLATFORM HEIGHT UP TO 5000mm

MADE UP OF:

1x **BASE PACK** ML-RJSKAFF-COM5BSE
 1x **TOWER PACK** ML-RJSKAFF-COM5TOWER
 1x **RISER PACK** ML-RJSKAFF-COM5RISER
 2x **TOE BOARD PACK** ML-RJSKAFF-COM5TOE
 1x **STABILISER PACK** ML-RJSKAFF-STAB
 1x **SCAFFOLD LADDER** ML-RJSKAFF-COM5LDR
 1x **LADDER SUPPORT** ML-RJSKAFF-COM5LDSP

Note: Dimensions are internal
Add 50mm for external dimensions



A BASE PACK

ML-RJSKAFF-COM5BSE

PACK CONTAINS:

2x **2110 x 1250mm** Five rung frames
 1x **2500 x 540mm** Platform with hatch
 2x **2500mm** Horizontal braces
 1x **2795mm** Bottom brace
 2x **2625mm** Diagonal braces
 4x **6"** Adjustable castor wheels



B RISER PACK

ML-RJSKAFF-COM5RISER

PACK CONTAINS:

4x **1310 x 1250mm** Three rung frames
 2x **1000 x 1250mm** Guard rails
 4x **2625mm** Diagonal braces
 4x **2500mm** Horizontal braces
 1x **2500 x 540mm** Platform




C TOWER PACK

ML-RJSKAFF-COM5TOWER

PACK CONTAINS:

2x **1710 x 1250mm** Four rung frames
 6x **2625mm** Diagonal braces

*Platform not included

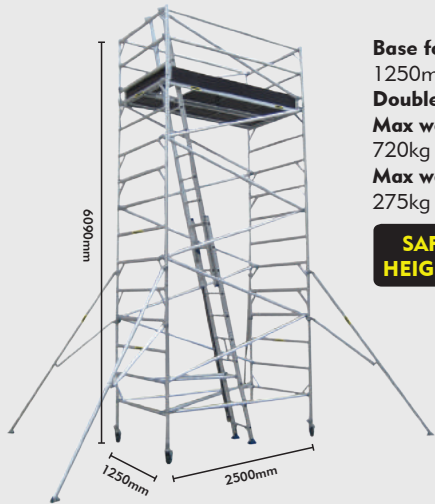

Base footprint
1250mm x 2500mm
Double width scaffold
Max working load
720kg on scaffold
Max working load
275kg on each platform

SAFE PLATFORM HEIGHT UP TO 5.0m

Stabilisers and toe boards must be used when platform height exceeds 1.9m

ACCESSORIES

SCAFFOLD LADDER

ML-RJSCAFF-COM5LDR

Ladder set up to be used when platform height is above 1.9 metres.

PACK CONTAINS:

1x 6.0m Extension Ladder



LADDER SUPPORT

ML-RJSCAFF-COM5LDRSP

Support for ladder when platform height is above 1.9 metres.



SCAFFOLD TOE BOARD PACK

ML-RJSCAFF-COM5TOE

Toe board set must be used when platform height is above 1.9 metres.

PACK CONTAINS:

2 x 2450 x 200mm Interlocking side boards
2 x 1140 x 200mm Interlocking end boards



SCAFFOLD STABILISER PACK

ML-RJSCAFF-STAB

Required when platform height is above 1.9 metres. Provides lateral support when working at heights.

PACK CONTAINS:

4x 2500mm Outriggers/Stabilisers



SCAFFOLD HANDRAILS

ML-RJSCAFF-COM5HRL

Additional handrails are available for versatility.

PACK CONTAINS:

2x 2500mm Horizontal Brace



SCAFFOLD PLATFORMS

ML-RJSCAFF-COM5PLAT

Additional platforms are available for versatility.

PACK CONTAINS:

1x 2450 x 540mm Platform



FEATURES

HIGH REACH

Stable to a working height of 5.0 metres with the ability for fast setup and easy transportability.



FULL ROUND TUBING

Durable and strong, 50mm diameter with 2mm wall thickness aluminium tubing.



QUICK RELEASE LOCKING PINS

Strong locking pins for quick setup and dismantling.




PLATFORM LOCKING PINS

Stability is ensured by using automatic locking pins.



ADJUSTABLE FEET

Lockable, adjustable feet for stability.



SAFETY TIPS

1. Ensure that you refer to the assembly instructions supplied before installation.
2. Inspect all parts to ensure there is no damage to any parts prior to assembly.
3. Ensure stabilisers are fitted when specified in the instructions.
4. When scaffolding is being moved, the height should not exceed 4m.
5. Never stand on an unguarded platform.

**** For further safety instructions please refer to pages 3 & 4 of the assembly instructions.**

Scaffold at above 5m total height must be assembled, maintained, repaired, dismantled by a holder of a current certificate of competence (WorkSafe NZ)



TRADE SCAFFOLD

AS/NZS 1576.1:2010
INDUSTRIAL
720KG WORKING LOAD



HIGH REACH

LOCKING PINS



LIGHTWEIGHT PORTABLE



FAST SETUP



Harkness & Young Ltd



www.gorillaladders.co.nz